


RP430 ALF™ Climb Assist Pulley

Data Sheet

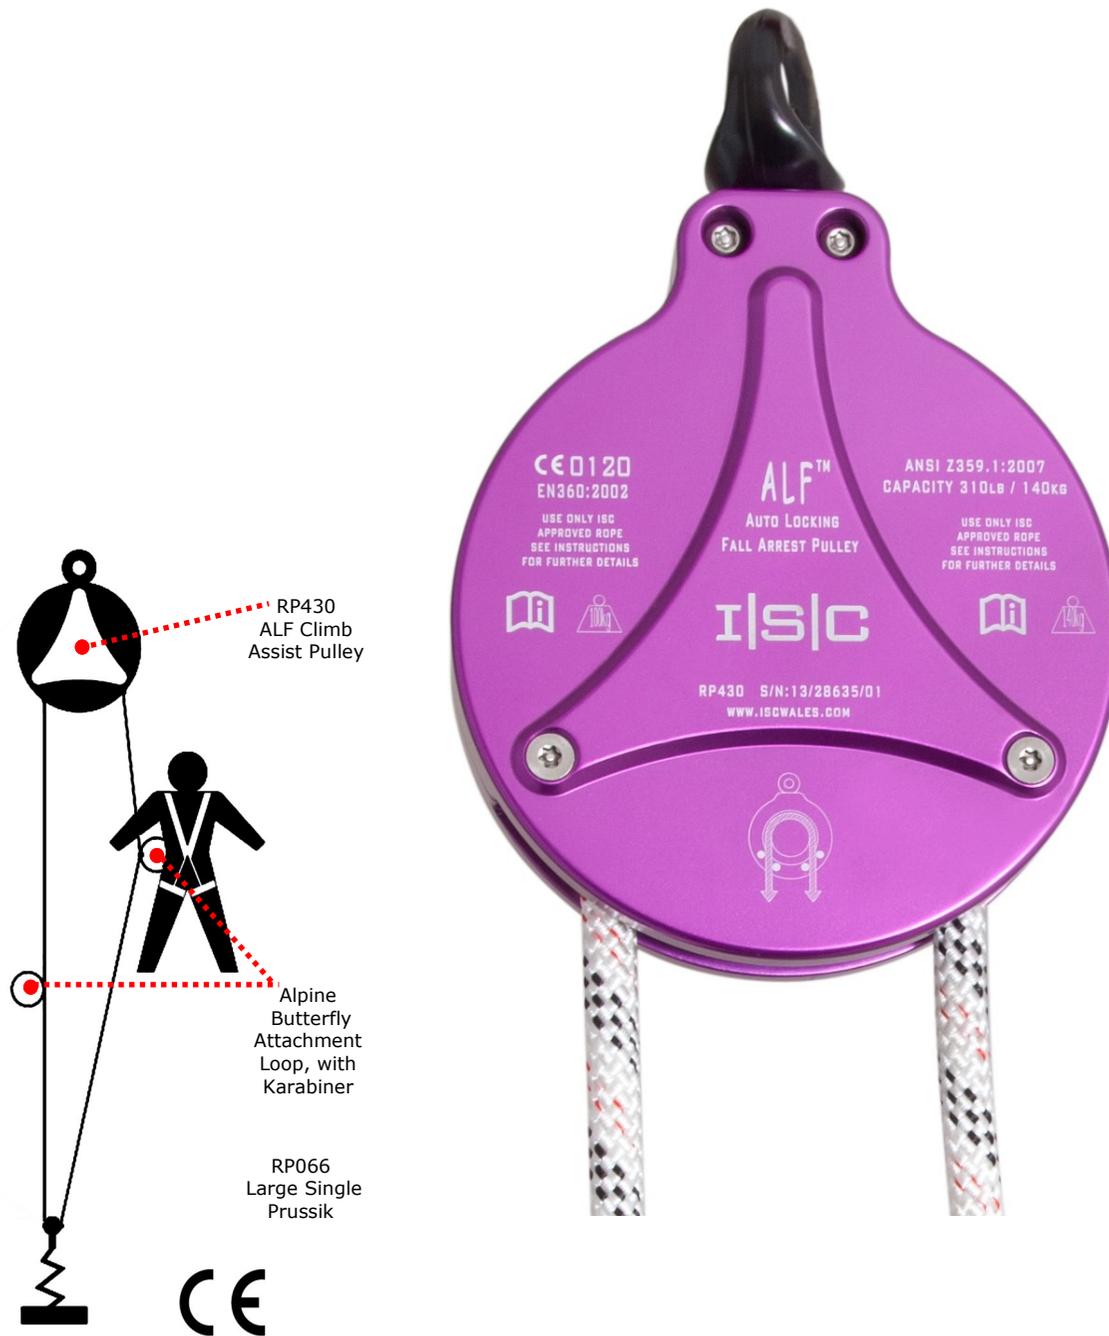


climb. work. rescue.

I|S|C

SOLUTIONS IN METAL

The ALF™ Climb Assist Pulley uses a uniquely designed locking system, which combines a speed sensitive inertia locking brake system, with a grooved pulley wheel. The ALF has been field trialled and cycle tested by over 4000 users with no detriment to performance and with little or no wear. The ALF has been extensively drop tested, in line with both CE EN360 and ANSI Z359. The unit has also been tested with weights other than those required for CE and ANSI Standards and has been statically pulled to destruction- making it probably the safest Climb Assist product in the world!

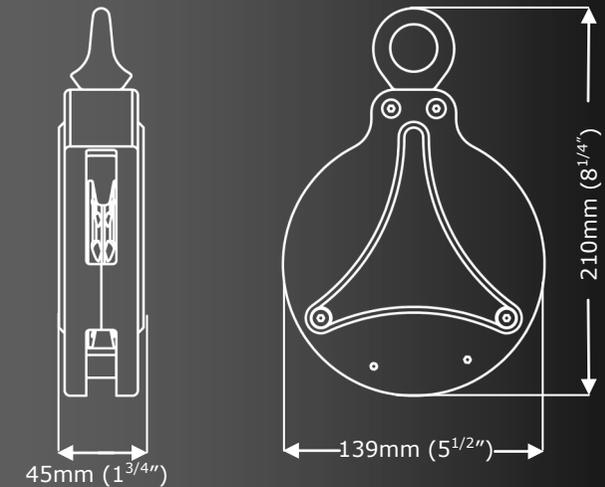

Weight	1205g (43oz)
Rope Size	Approved 11mm EN1891-A Ropes only
Body Material	Aluminium
Finish	Anodised
WLL	140kg (310lbs)